

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[www.zoeller.com](http://www.zoeller.com)

# ZOELLER ONSITE WASTEWATER PRODUCTS

## ZOELLER SEPTIC SYSTEM FILTERS




### Zoeller Pressure Effluent Filter

The Zoeller Pressure Filter will help prolong the life of an onsite drain-field by filtering out solids which cause plugging. Used in both residential and commercial applications, this unique design and mounting location allows the filtering screen to be scrubbed while in operation, providing maximum maintenance intervals and unmatched performance.

The filter screen is a type 347 S.S. with 1/16" diameter holes, which controls the particle sizes leaving the tank. By using sock inserts, filtration to 100 or 600 microns is achieved. The element is 3 inches in diameter and 18 inches long with a 69.5 square inch open area. The large open area results in minimal head loss (see below).

Use in low-pressure pipe, drip, or enhanced flow applications. Use as a prefilter for dosed treatment devices such as recirculating media filters.

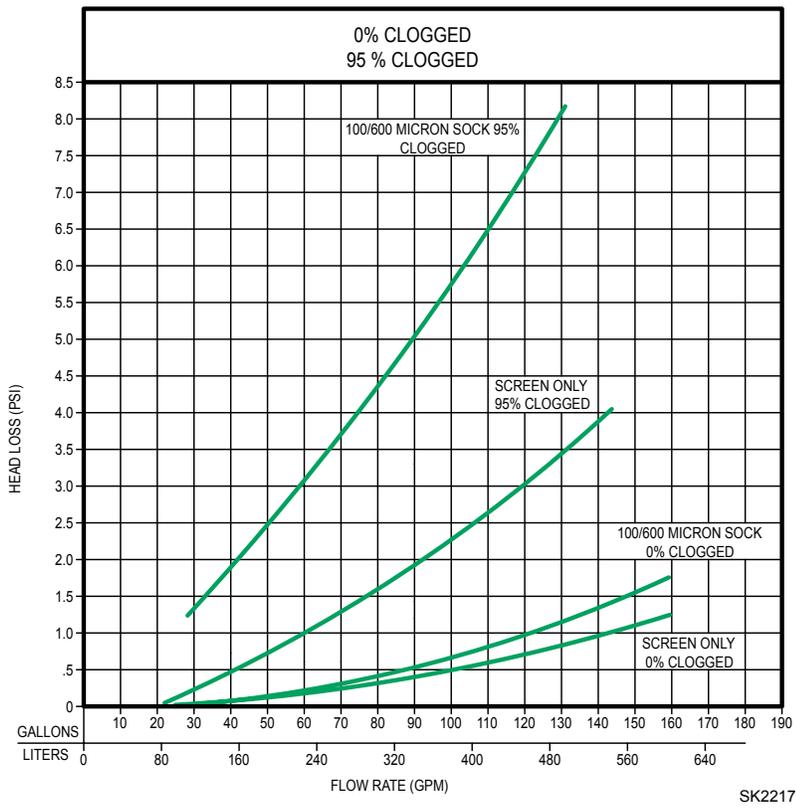

Part Number	Description
5000-0001	2" inlet/outlet
5000-0008	3" inlet/outlet
5000-0013	Replacement Screen (fits 2" or 3" models)

# Zoeller Pressure Effluent Filter Accessories

## PROTECTIVE SOCK

100 and 600 micron Protective Sock for finer filtration. The 100 micron sock can be used in conjunction with most drip systems.



P/N 5000-0002 100 micron Sock  
P/N 5000-0003 600 micron Sock

## PRESSURE ALARM SWITCH

The pressure switch will activate an alarm in the event of a clogged filter. Pressure alarm switch can be adjusted between 3 to 24 lbs. standard. Supplied with 5 ft. of - 1/4" tubing, adjustable switch and 10 ft. of electrical cord.



P/N 5000-0006 Pressure Alarm Switch  
(order alarm separately)

## ALARM



Tested to UL Standard UL 508 & Certified to CSA Standard C22.2 No. 205

Indoor/Outdoor alarm box to work with the pressure alarm switch. Visual red light & audible alarm. 115 V. UL Listed and CSA Certified.



P/N 10-0623 Indoor/Outdoor Alarm

## LID WRENCH & FILTER REMOVAL TOOLS

The 40" long standard screen removal wrench allows for easy filter maintenance. The boxed end is designed for loosening and removing the filter cap, while the hooked end easily lifts the filter screen. After servicing, the same tools can be used for re-installation.


The bristle screen removal wrench is designed to remove the filter without tearing the optional protective socks.



P/N 5000-0004 Standard screen removal wrench.

P/N 5000-0005 Bristle screen removal wrench (use with protective socks).

Product may not be exactly as pictured.

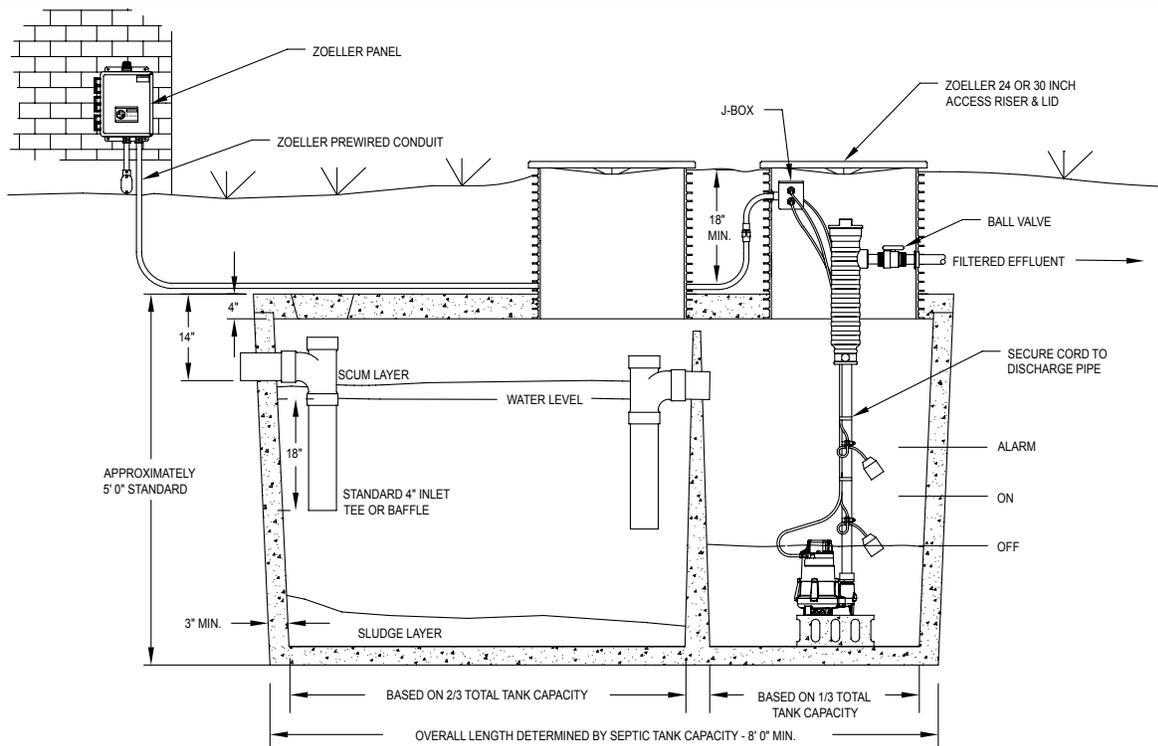

SK2168

ALL ZOELLER ONSITE WASTEWATER PRODUCTS MUST BE INSTALLED IN ACCORDANCE WITH LOCAL AND/OR STATE PLUMBING AND/OR HEALTH DEPARTMENT CODES.