



Screened Vaults

Submittal
Data Sheet



Orengo Systems[®]
Incorporated


1-800-348-9843

Applications

Orengo Screened Vaults are used to screen effluent being pumped from septic tanks in STEP systems and in on-site wastewater disposal systems.

General

Orengo Screened Vaults are composed of a rigid cylindrical vault with a fiberglass base, a polyethylene screen and two support pipes. Effluent enters through eight influent holes around the perimeter of the vault and flows through the screen to the effluent pump. Orengo Screened Vaults are covered by US patent #4439323.

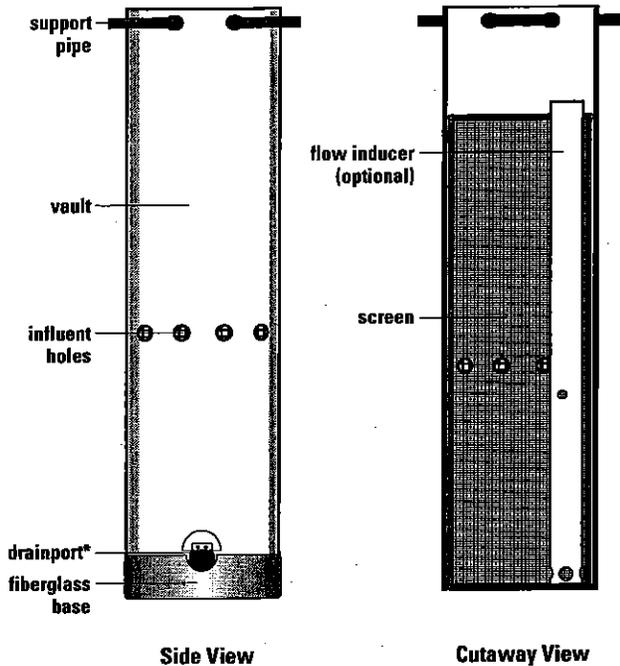


Standard Models

SV1548-16, SV1548FI-16, SV1554-22, SV1554FI-22, SV1560-28, SV1560FI-28, SV1560FIFI-18

Nomenclature

SV XX XX FI-XX

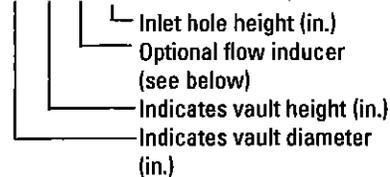

* Screened Vaults that are taller than 60" and have inlet holes higher than 12" from the bottom are equipped with two drainports.