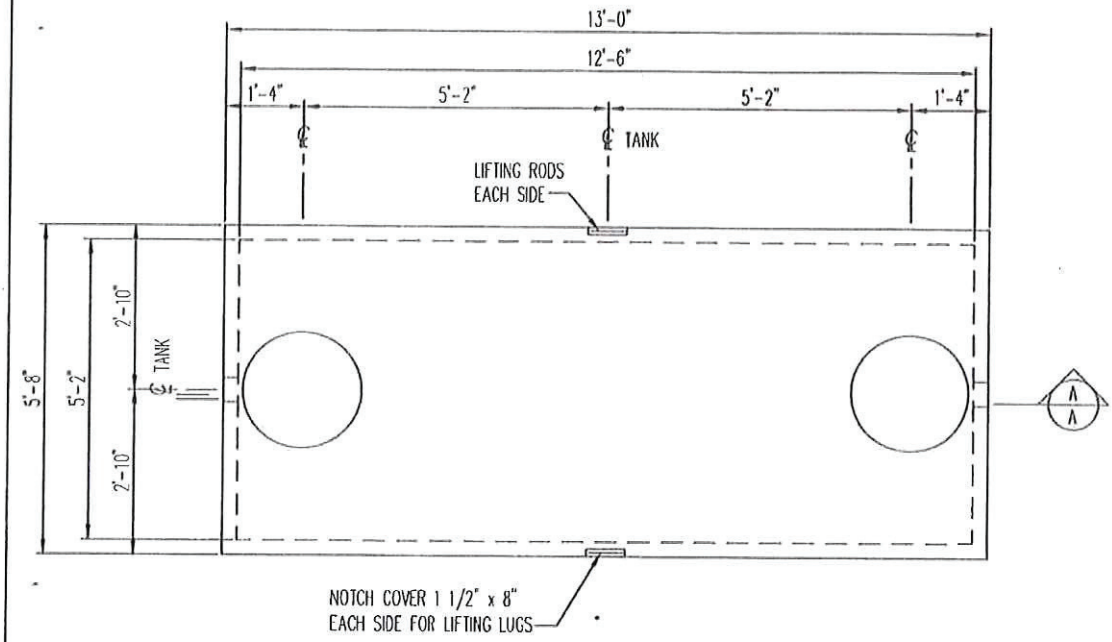

1600 GALLON TANK
1/2" = 1'-0"

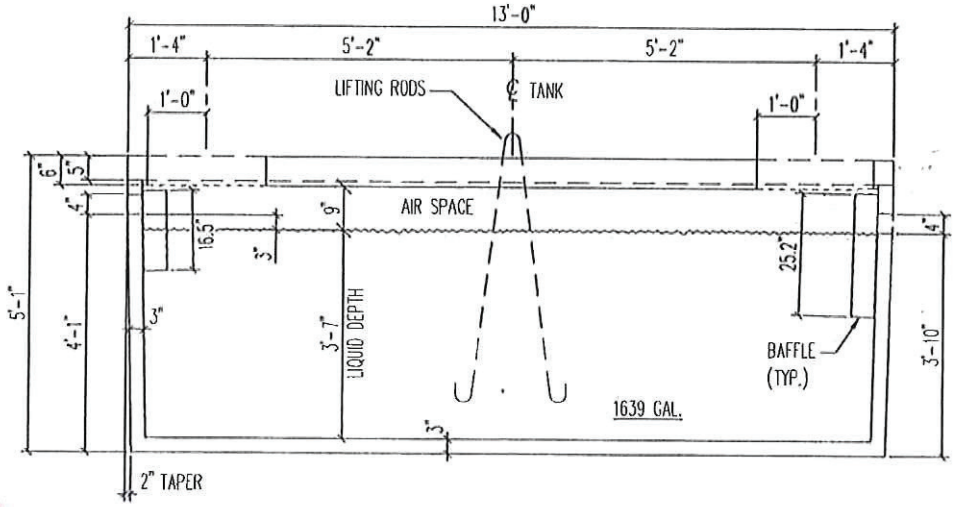

A/A SECTION
1/2" = 1'-0"

NOTE:
1. PROVIDE MINIMUM 1" CLEAR BETWEEN TOP OF BAFFLE AND UNDERSIDE OF LID.
2. PUMP TANK (PT) HAS NO OUTLET BAFFLE.

1600 GALLON SEPTIC OR PUMP TANK (1600 ST OR 1600 PT)	Brown Wilbert	WEIGHT=14,000# MAX. SOIL COVER= 7'-0"

Conditionally APPROVED
SEE CORRESPONDENCE

RECEIVED
APR 22 2014
SAFETY & BUILDINGS

20140147

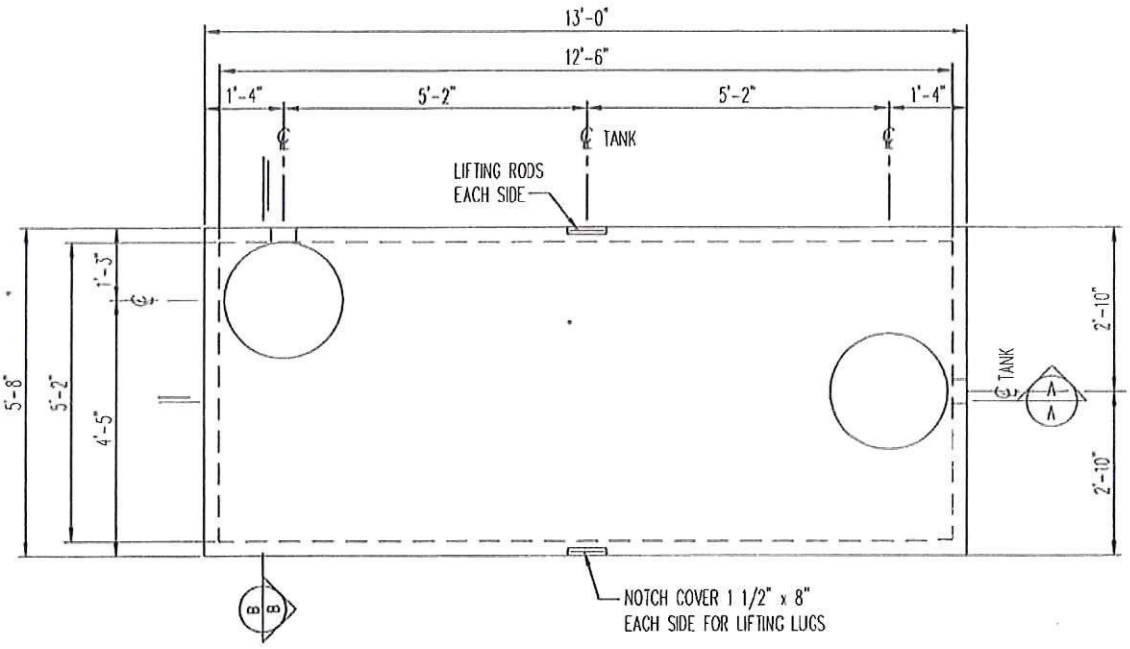

1600 GALLON TANK
1/2" = 1'-0"

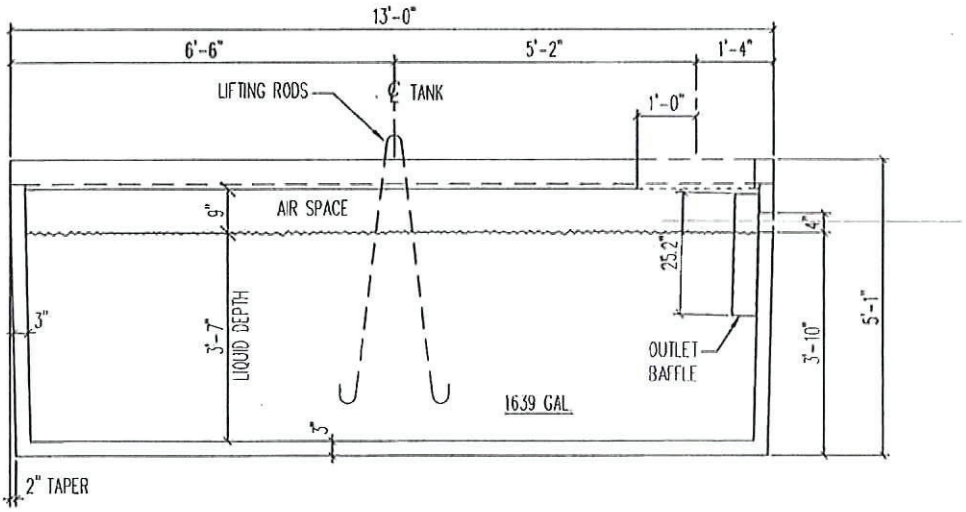

A
A
SECTION
1/2" = 1'-0"

NOTE:
1. PROVIDE MINIMUM 1" CLEAR BETWEEN TOP OF BAFFLE AND UNDERSIDE OF LID.
2. PUMP TANK (PT) HAS NO OUTLET BAFFLE.

Conditionally APPROVED
SEE CORRESPONDENCE

RECEIVED
APR 22 2014
SAFETY & BUILDINGS

1600 GALLON SEPTIC OR PUMP TANK (1600 ST-L OR 1600 PT-L)	Brown Wilbert	WEIGHT=14,000# MAX. SOIL COVER= 7'-0"

20140147

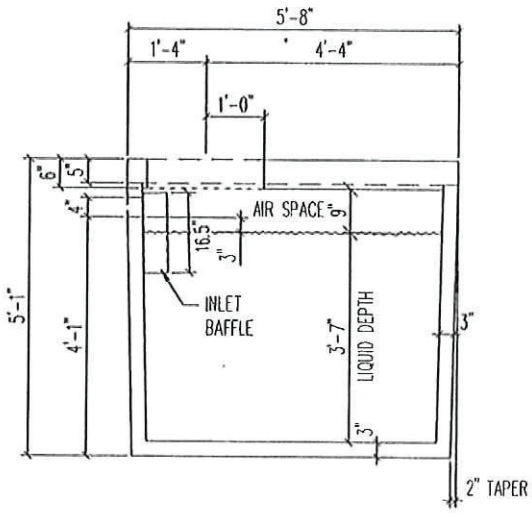

B/B SECTION

1/2" = 1'-0"

Conditionally APPROVED

SEE CORRESPONDENCE

NOTE:

1. PROVIDE MINIMUM 1" CLEAR BETWEEN TOP OF BAFFLE AND UNDERSIDE OF LID.
2. PUMP TANK (PT) HAS NO OUTLET BAFFLE.

RECEIVED
APR 22 2014
SAFETY & BUILDINGS

1600 GALLON SEPTIC OR PUMP TANK (1600 ST-L OR 1600 PT-L)	Brown Wilbert	WEIGHT=14,000# MAX. SOIL COVER= 7'-0"

20140147

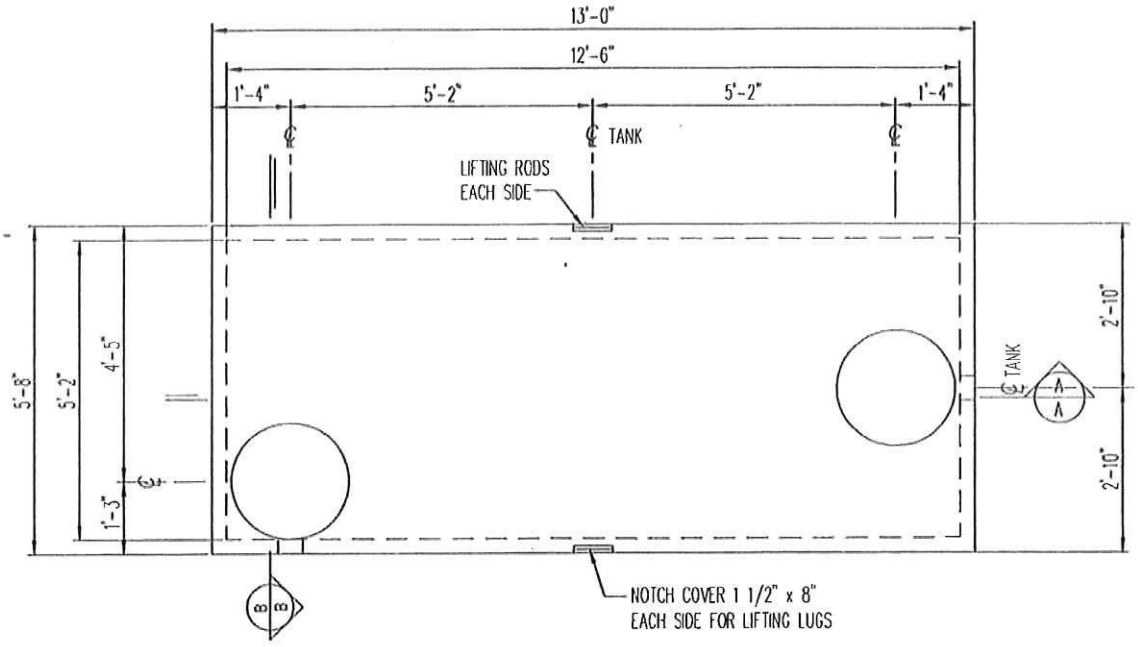

1600 GALLON TANK

1/2" = 1'-0"

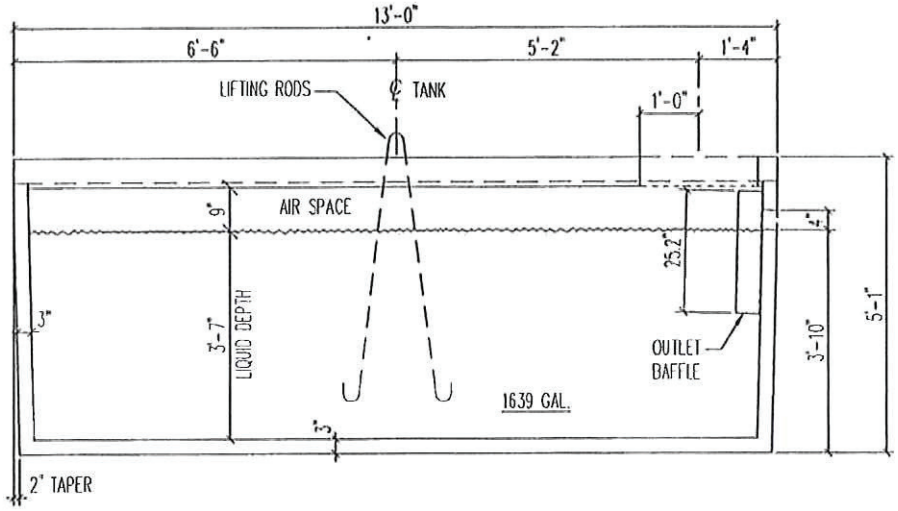

A SECTION A

1/2" = 1'-0"

NOTE:

1. PROVIDE MINIMUM 1" CLEAR BETWEEN TOP OF BAFFLE AND UNDERSIDE OF LID.
2. PUMP TANK (PT) HAS NO OUTLET BAFFLE.

Conditionally APPROVED

SEE CORRESPONDENCE

RECEIVED

APR 22 2014

SAFETY & BUILDINGS

1600 GALLON SEPTIC OR PUMP TANK (1600 ST-R OR 1600 PT-R)	Brown Wilbert	WEIGHT=14,000# MAX. SOIL COVER= 7'-0"

20140147

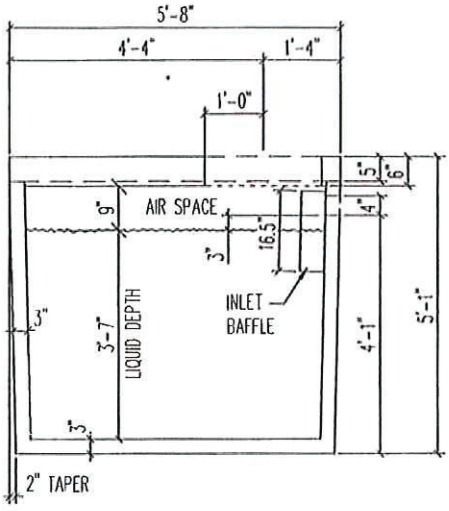

B/B SECTION

. 1/2" = 1'-0"

Conditionally APPROVED

SEE CORRESPONDENCE

NOTE:

1. PROVIDE MINIMUM 1" CLEAR BETWEEN TOP OF BAFFLE AND UNDERSIDE OF LID.
2. PUMP TANK (PT) HAS NO OUTLET BAFFLE.

RECEIVED
APR 22 2014
SAFETY & BUILDINGS

1600 GALLON SEPTIC OR PUMP TANK (1600 ST-R OR 1600 PT-R)	Brown Wilbert	WEIGHT=14,000# MAX. SOIL COVER= 7'-0"

20140147