


GRAVITY-DOSED SEPTIC / PUMP TANK SPECIFICATIONS (No Scale)

IMPORTANT:
Anchor tank(s) as necessary pursuant to SPS 383.43(8)(g)

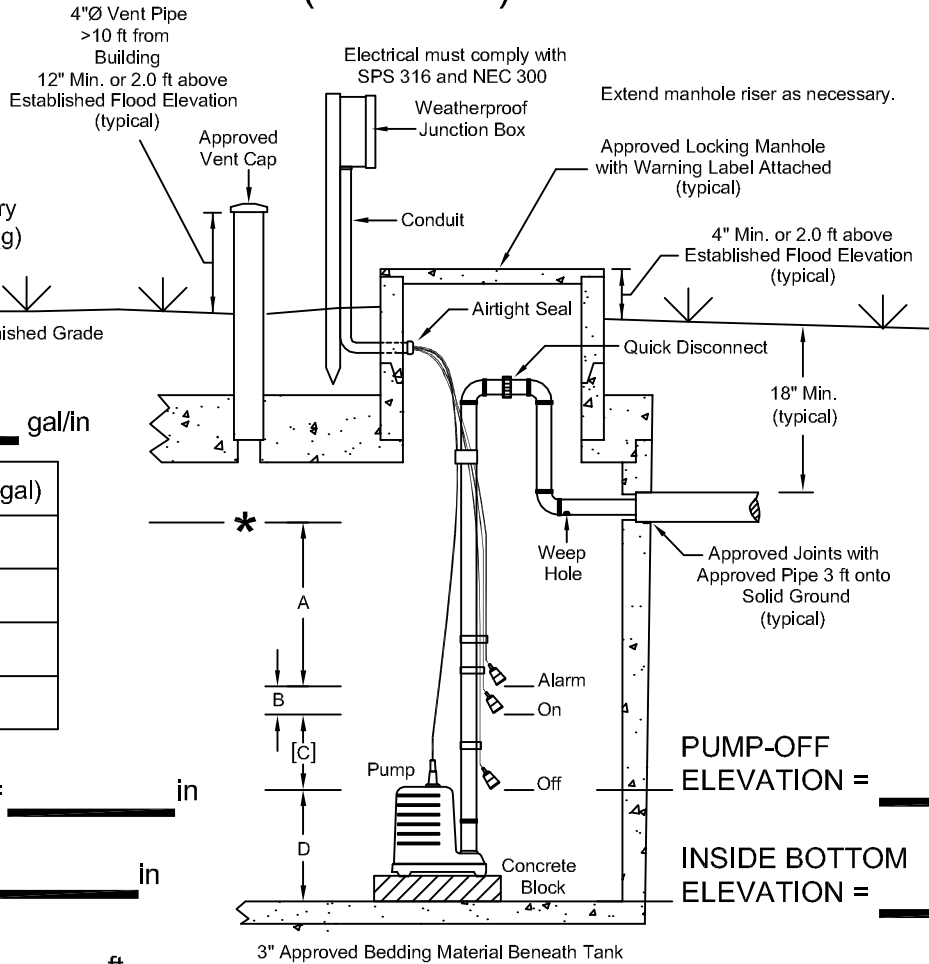

CAPACITIES @ _____ gal/in

| | Depth (in) | Volume (gal) |
|-----|------------|--------------|
| A | | |
| B | 2.0 | |
| [C] | | |
| D | | |

* Pump Tank Liquid Level = _____ in

Force Main Diameter = _____ in

Force Main Length = _____ ft

Force Main Void Volume = _____ gal

[C] Total Dose Volume (TDV) = _____ gal/dose

(≤ 0.2X design flow + force main void volume)

Vertical Lift = _____ ft

PUMP-OFF ELEVATION = _____ ft

INSIDE BOTTOM ELEVATION = _____ ft

PUMP TANK:

Volume = _____ gal

Manufacturer: _____

Pump Manufacturer: _____

Pump Model: _____ (See attached pump curve.)

Controls/Alarm Manufacturer: _____

Controls/Alarm Model: _____

Float switches containing mercury are prohibited.

SEPTIC TANK(S):

Total Volume = _____ gal

Manufacturer(s): _____

Install approved effluent filter at the septic tank outlet immediately upstream of the pump tank inlet.

Filter Manufacturer: _____

Filter Model: _____