


IN-GROUND GRAVITY DISPERSAL AREA

Uniform Elevation Trenches with Washed Aggregate

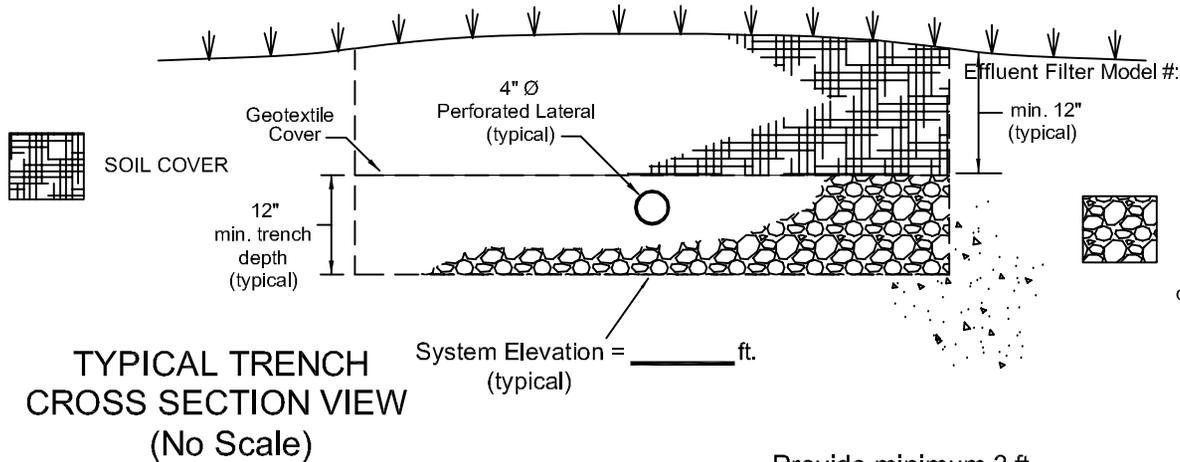

0.5" TO 2.5" WASHED AGGREGATE
 (min. 6.0" beneath distribution pipe
 - min. 2.0" over distribution pipe and
 covered with approved synthetic fabric)

Septic Tank(s) Manufacturer: _____


Septic Tank(s) Volume(s):
 _____ gal _____ gal _____ gal _____ gal

Effluent Filter Manufacturer: _____

Effluent Filter Model #: _____



Provide minimum 3 ft
 separation between trenches.

OBSERVATION PIPE DETAIL (No Scale)

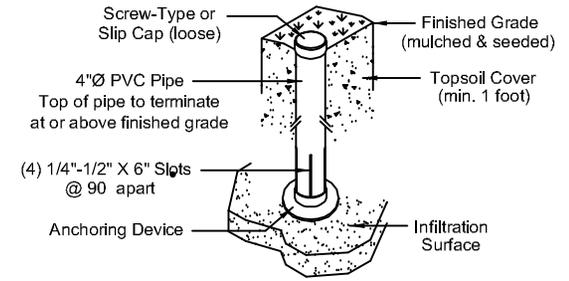

TYPICAL TRENCH PLAN VIEW (No Scale)

(Show location of inlet / outlet pipe connection on plan view.)

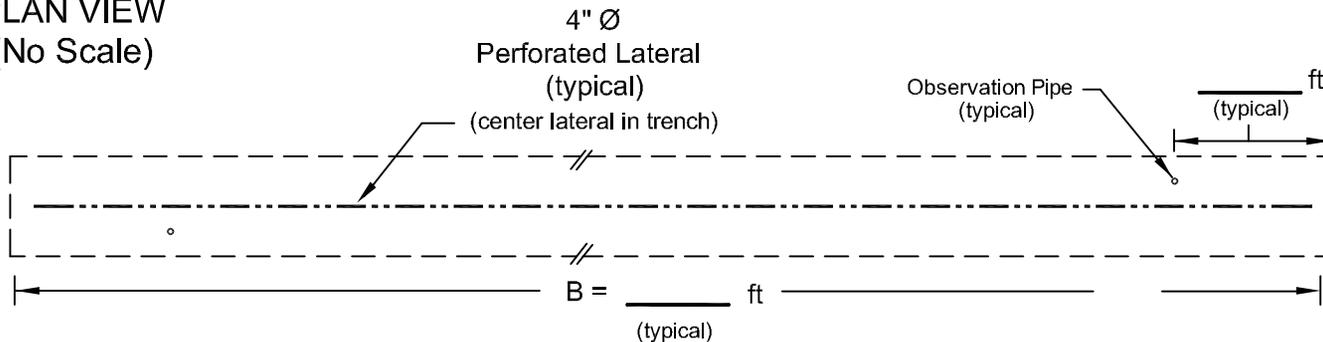

Required Infiltration Area = _____ ft²

Distribution Method: _____

Proposed Total Infiltration Area = _____ ft² per trench x _____ trenches = _____ ft²