
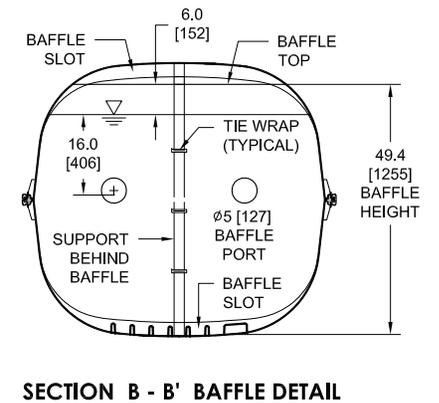
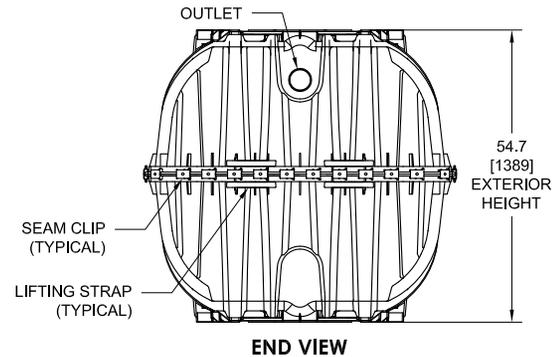



TANK EXTERIOR	
LENGTH	127.0 [3226]
WIDTH	62.2 [1580]
HEIGHT	54.7 [1389]

LIQUID DEPTH	44.0 [1118]
INVERT DROP	3.0 [76]
FREEBOARD	10.2 [260]

TOTAL CAPACITY	1287 GAL [4872 L]
WORKING VOLUME	1094 GAL [4141 L]
COMPARTMENT A VOL	733 GAL [2775 L]
COMPARTMENT B VOL	361 GAL [1366 L]

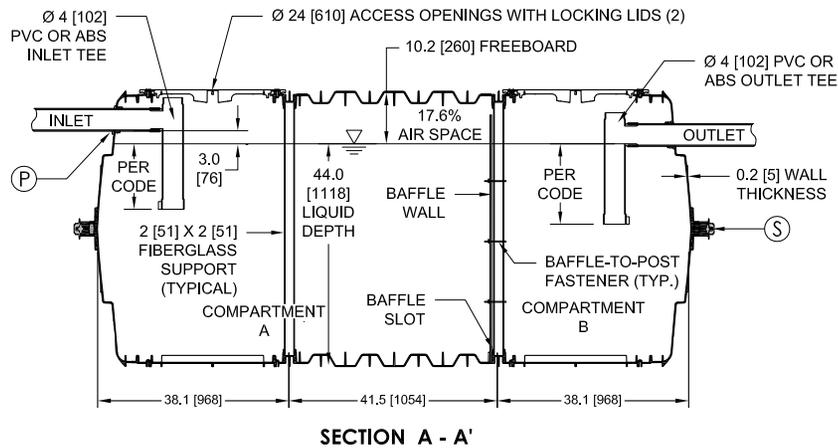

ISOMETRIC VIEW

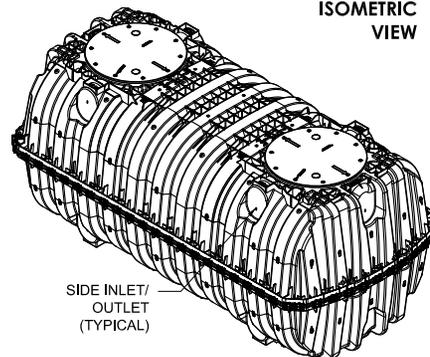

NOTES:

- ALL DRAWING DIMENSIONS IN INCHES [MILLIMETERS] OR AS NOTED.
- EXTERIOR OF ACCESS OPENING LID INCLUDES THE FOLLOWING WARNING IN ENGLISH, FRENCH & SPANISH: "DANGER DO NOT ENTER: POISON GASES."
- TANK MARKINGS INCLUDE: MANUFACTURER NAME, MODEL NUMBER, LIQUID CAPACITY, DATE OF MANUFACTURE, MAXIMUM BURIAL DEPTH, INLET, AND OUTLET.
- MAXIMUM BURIAL DEPTH IS 48 in [1219 mm].
- MINIMUM BURIAL DEPTH IS 6 in [152 mm].
- MAXIMUM VEHICLE LOAD IS 4500-lb [20-kN] AXLE LOAD.
- TANK IS FOR NON-TRAFFIC APPLICATIONS.
- AIRSPACE IS 17.6%.
- OUTLET TEE IS COMPATIBLE WITH AN EFFLUENT FILTER.
- INTERIOR LENGTH TO WIDTH RATIO IS 2.3:1 (118.8-INCH INTERIOR LENGTH / 51.7-INCH INTERIOR WIDTH = 2.3).
- FREE VENT AREA ABOVE TOP OF BAFFLE WALL IS 39.7 in².
- PARTITION BAFFLE THICKNESS IS 0.31 in [8 mm].



Infiltrator Systems Inc.
6 Business Park Rd. Old Saybrook, CT 06475
(800) 221-4436

**IM-1060
2-Compartment Septic Tank Configuration**

Drawn by: BWB	Checked by: DJL	Date: 10-10-11
Scale: Not to scale	Drawing: IM1060-2	Sheet: 1 of 1